


# FATS, OILS, GREASE AND GARBAGE (FOGG) WASTEWATER INTERCEPTOR

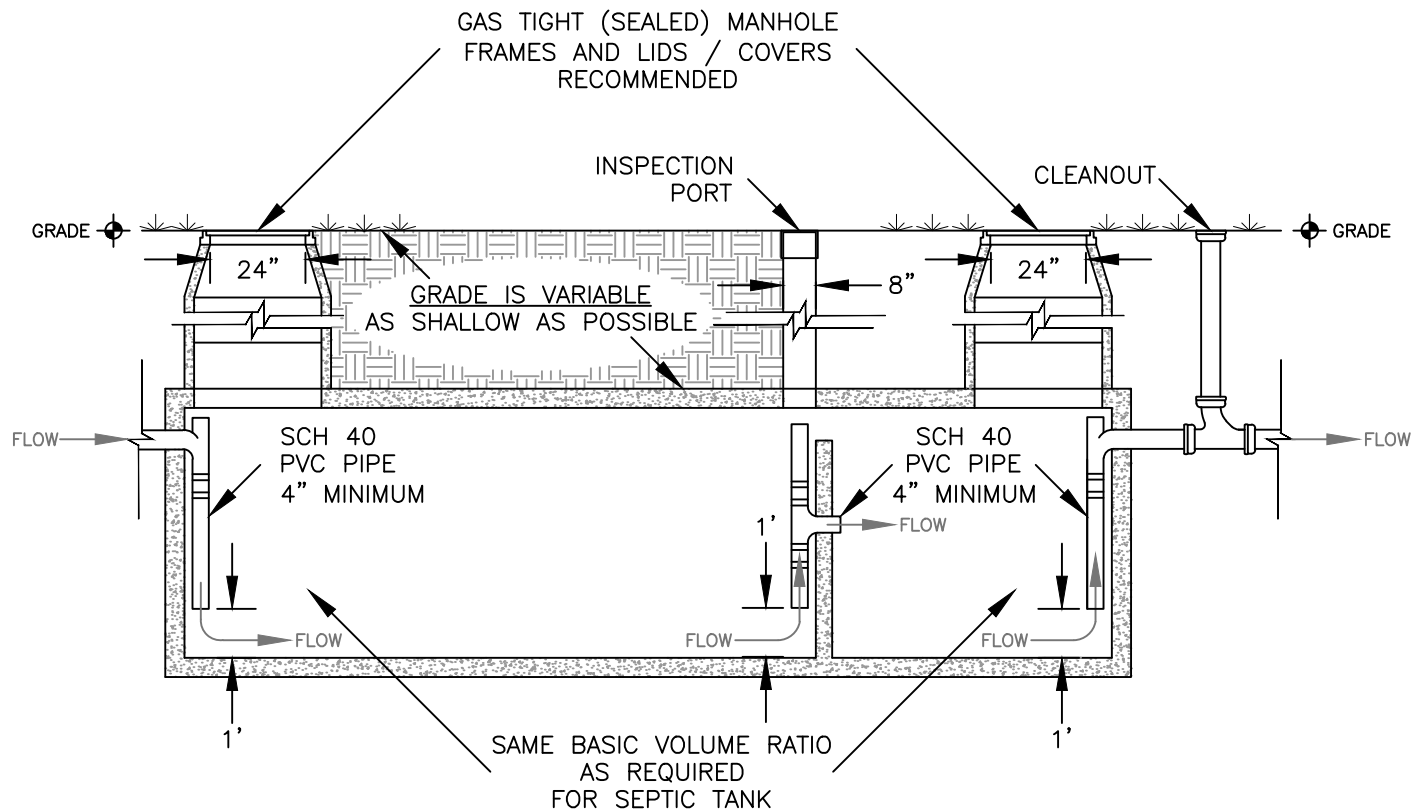

## SECTION

1. FOGG WASTEWATER INTERCEPTOR SIZE, ALL RELATED PIPING, ALL CONNECTIONS AND APPURTENANCES SHALL BE IN ACCORDANCE WITH THE UNIFORM PLUMBING CODE (UPC) – UTILIZING MOST CURRENT VERSION, REVISION, ADDENDUM AND / OR SUPPLEMENT.
2. FOGG WASTEWATER INTERCEPTOR MINIMUM SIZE SHALL BE ONE THOUSAND (1000) GALLONS FOR EXTERIOR INSTALLATIONS OR SIZED AS PER CURRENT PLUMBING CODE FOR INTERIOR INSTALLATIONS.
3. FOGG WASTEWATER INTERCEPTOR SHALL BE VENTED THROUGH STRUCTURE SERVED / SUPPLYING WASTEWATER.
4. FOGG WASTEWATER INTERCEPTOR MANHOLE FRAMES, LIDS / COVERS, INSPECTION PORT(S) AND CLEANOUT(S) RECOMMENDED TO BE GAS-TIGHT (SEALED). LIDS SHALL BE TEXTURED SLIP RESISTANT WITHOUT CITY LOGO AND LABELED AS "SANITARY SEWER."
5. FOGG WASTEWATER INTERCEPTOR LOCATED WITHIN THE PATH OF MOTOR VEHICLE TRAVEL SHALL HAVE TRAFFIC BEARING (RATED) FRAMES, LIDS / COVERS, INSPECTION PORT(S) AND CLEANOUT(S).

December 2021



Engineering Division

## Fats, Oils, Grease and Garbage (FOGG) Wastewater Interceptor

*Kevin J. Slovarp*

Approved By  
City Engineer  
Kevin J. Slovarp

Adopted: 02/1990

Revised: 09/28/2020

**STD - 531**