



TRUNCATED DOME SIZE

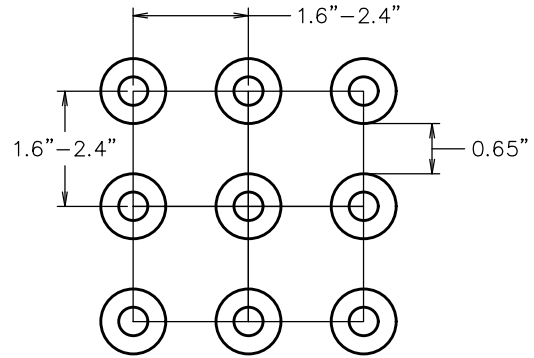

TRUNCATED DOME  
PATTERN & SPACING

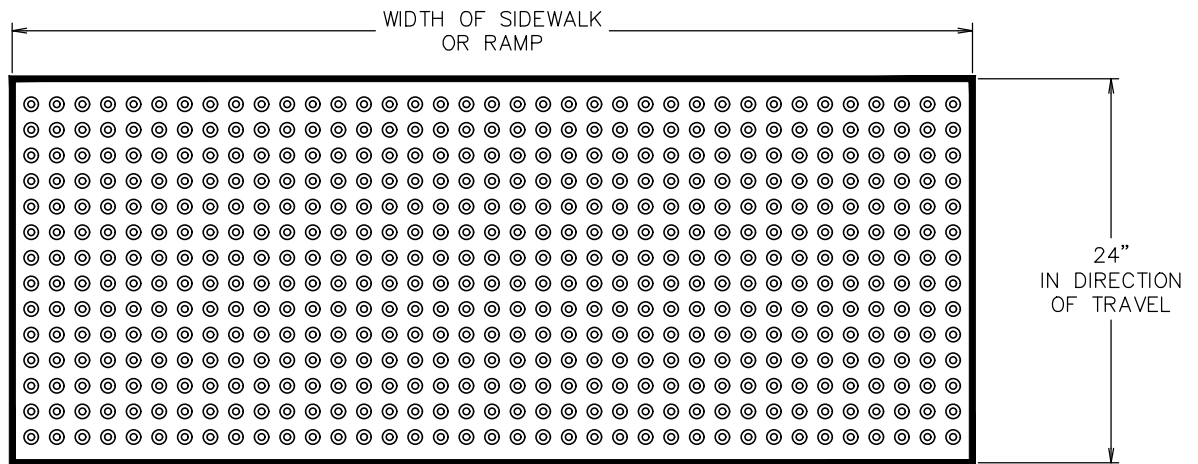

DETECTABLE WARNING PANEL

NOTES:

1. DETECTABLE WARNING SURFACE SHALL FULLY COMPLY WITH PROWAG REQUIREMENTS AND SPECIFICATIONS
2. DETECTABLE WARNING SURFACE SHALL EXTEND THE FULL WIDTH OF THE CROSSING OR RAMP
3. SEE CITY OF MISSOULA MODIFICATION TO MPWSS SECTION 02529 FOR MATERIAL REQUIREMENTS
4. DETECTABLE WARNING SURFACE SHALL BE PLACED TWO (2") INCHES FROM BACK EDGE OF CURB (RADIAL DOMES MAY BE REQUIRED)



Engineering Division

Detectable Warning Surface

Approved By  
City Engineer  
Kevin J. Slovarp

Adopted: 03/12/2004  
Revised: 01/01/2023

**STD - 750**