


EJCO 3777Z1/AGS, D&L A-1171 LOCKABLE
OR APPROVED EQUIVALENT

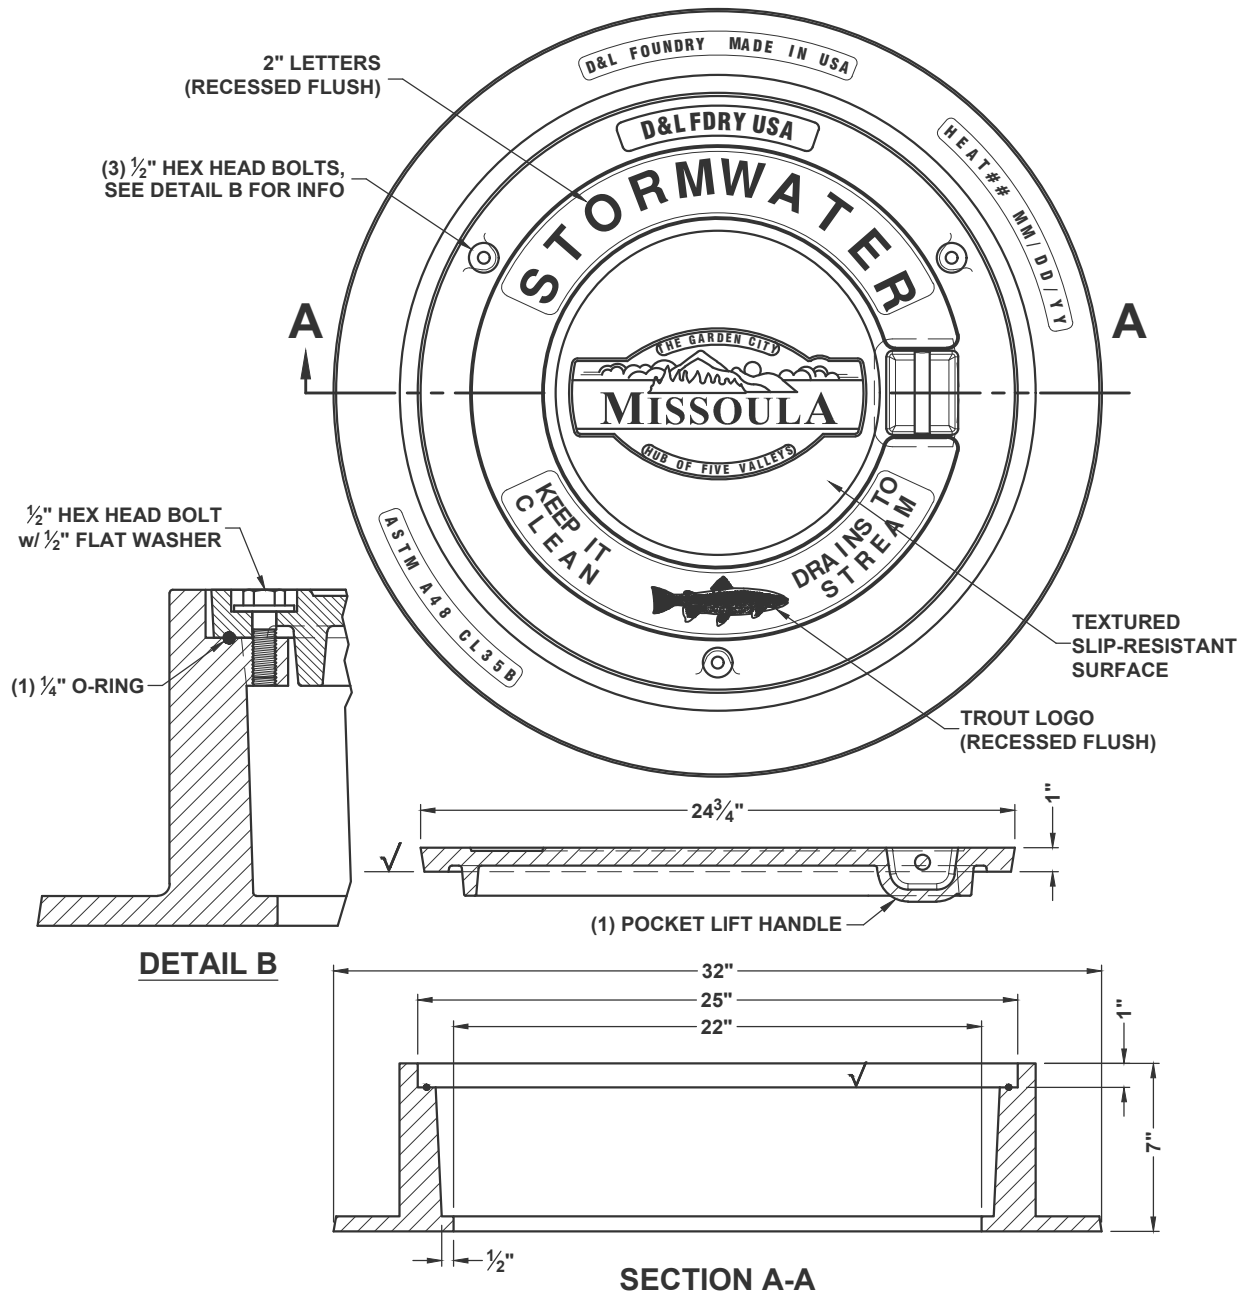

GENERAL NOTES:

1. FOR USE WHEN THE MANHOLE CAN BECOME PRESSURIZED.
2. FOR CITY-OWNED INFRASTRUCTURE ONLY. FOR PRIVATE STRUCTURES WITHIN THE RIGHT-OF-WAY PROVIDE A TEXTURED SLIP RESISTANT LID WITHOUT CITY LOGO - MUST HAVE "STORMWATER" ON LID.
3. PROVIDE LIDS AND RINGS THAT MEET AASHTO 306 HS20 LOADING RATING OR HIGHER.
4. COMPOSITE TAPERED GRADE RINGS SHALL BE USED TO MATCH FRAME & GRATE TO THE CURB LINE CROSS SLOPE AND RUNNING SLOPE OR STREET CROSS SLOPE AND RUNNING SLOPE WHERE NOT IN CONCRETE.
5. 4-INCH MANHOLE RING MAY BE USED IN LIEU OF A 7" RING ONLY WITH PRIOR APPROVAL FROM CITY ENGINEERING.

December 2021



Engineering Division

Stormwater Lockable Lid and Frame

AS

Approved By
Utility Engineer
Andy Schultz, PE

Adopted: 09/28/2020
Revised: 06/24/2021

STD - 605