


1/2" THICK MASTIC SHALL BE PLACED AGAINST BUILDING FOUNDATION, FLUSH OR JUST BELOW TOP FINISHED SURFACE OF SIDEWALK, FULL DEPTH, AND SECURED IN PLACE BEFORE POURING



GENERAL NOTES:

1. SEE MCPWSS CH. 7 AND CITY OF MISSOULA MODIFICATIONS TO THE MPWSS SECTION 02925 FOR ADDITIONAL INFORMATION.

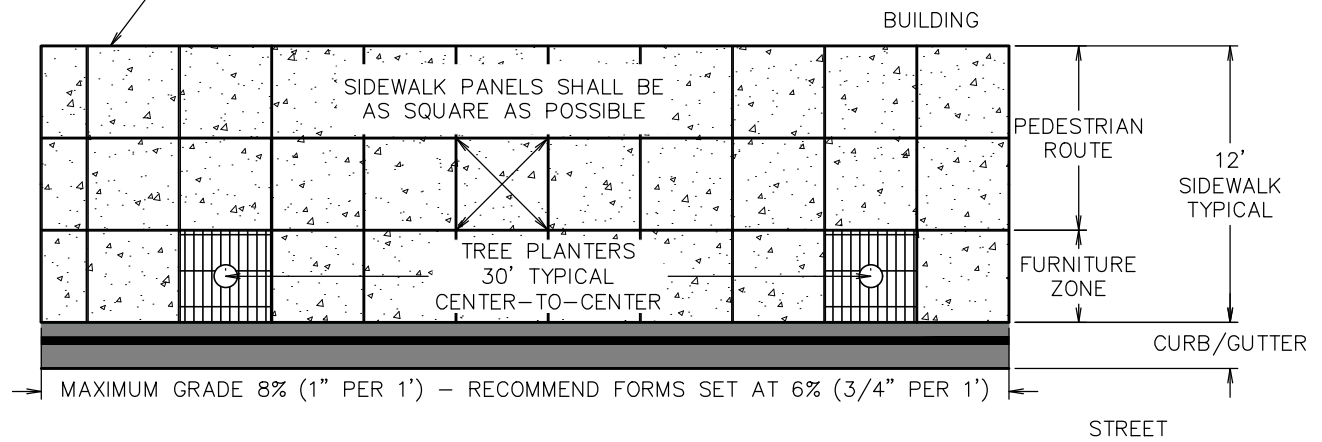

Engineering Division

Typical Wide Sidewalk Section

Approved By
City Engineer
Kevin J. Slovarp

Adopted: 06/18/1984
Revised: 01/01/2023

STD - 753