


NOTE: NO UNRESTRAINED JOINTS
WITHIN 36 FEET OF BLOWOFF



GENERAL NOTES:

1. CONSTRUCTION MATERIALS AND PROCEDURES SHALL COMPLY WITH MONTANA PUBLIC WORKS STANDARD SPECIFICATIONS (MPWSS), 7TH EDITION, APRIL 2021, AS MODIFIED BY THE MISSOULA CITY PUBLIC WORKS STANDARDS AND SPECIFICATIONS MANUAL, APPENDIX 2-A (STANDARD MODIFICATIONS TO MPWSS), CURRENT EDITION.
2. ROAD BOXES TO BE PLACED FLUSH TO 1/4" BELOW FINISHED GRADE IN HARD SURFACE.

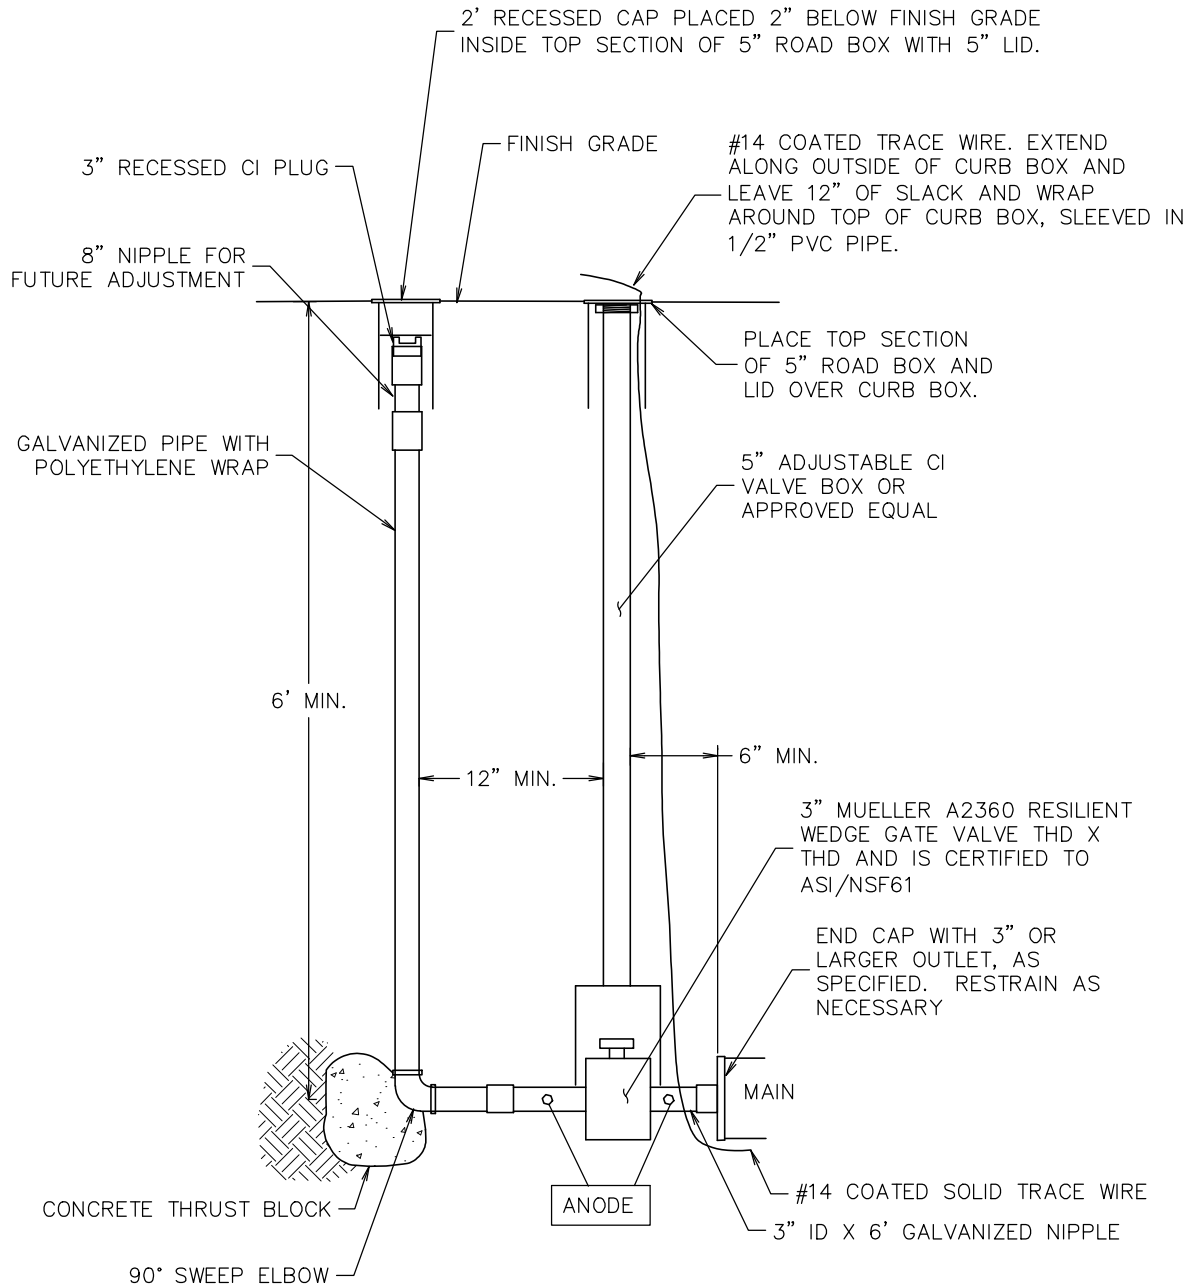

Engineering Division

Typical Blow-Off Assembly

Logan McInnis

Approved By
Utilities Engineer
Logan McInnis, PE

Adopted: 09/28/2020
Revised: 01/01/2023

STD - 409